




CAL-3150 Series Pro Audio Cabinet Loudspeaker

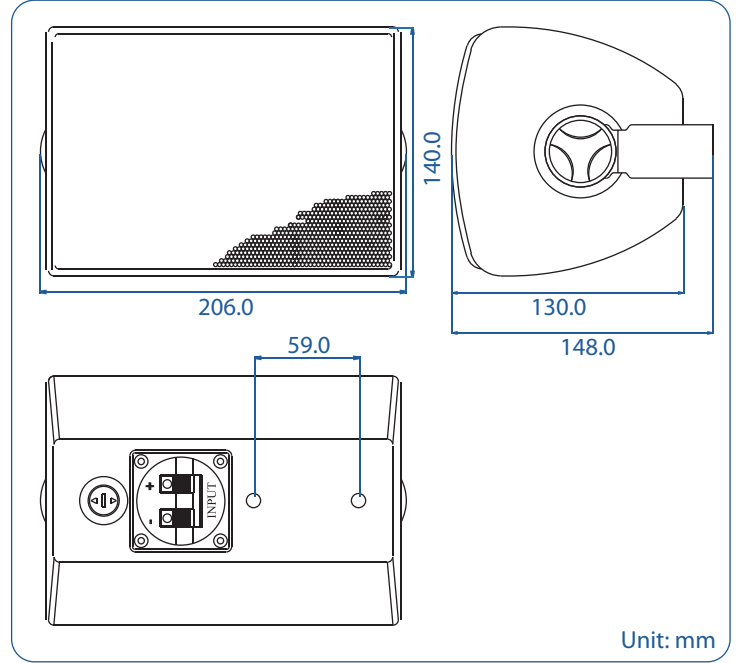

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Very high quality 2-way speaker system with 3.5" polypropylene bass / mid cone & 8-ounce magnet + mylar laminate dome tweeter
- Durable nylon / Fibre multi bracket optional (broken tested up to 45.4 kg)
(B8-10-0091 multi bracket-Black & B8-19-0091 multi bracket - White - See accessory page)
- Rotary power selector
- Bass reflex design
- Designed for the pro audio and commercial market
- Designed utilizing CES Audio's anechoic test facilities with state of the art digital system analysis for accurate cabinet specification
- Attractive trapezoid cabinet design for improved directivity and versatile mounting
- Made from acoustically matched high impact polystyrene
- U mount bracket included as a standard accessory
- Finished in black or white

Model No.	CAL-3150	CAL-3150W
Rated Power (rms)	15W	
Impedance	667Ω, 1.33kΩ, 2.67kΩ, 5.33kΩ & 8Ω	
Power Taps @ 100V	15W, 7.5W, 3.75W, 1.9W & 8Ω	
Power Taps @ 70V	7.5W, 3.75W, 1.9W, 1W & 8Ω	
SPL (1W / 1m)	88dB	
Max. SPL (Rated W / 1m)	100dB	
Frequency Range (-10dB)	85 Hz ~ 25k Hz	
Dispersion 1k Hz / 4k Hz	200° / 130°	
Operating Temperature	-30°C ~ +60°C	
Power Selection	Selecting switch	
Termination	Push terminal	
Material	Housing: High impact polystyrene, Grille: Steel	
Colour / Finish	Black	White
Dimensions	206.0 (8.11) W X 140.0 (5.51) H X 130.0 (5.12) D mm. (in.)	
Net Weight (ea)	1.87 kg (4.12 lb.)	
Mounting	U Type steel bracket	

■ **Rated Power according to IEC 60268- 5 100 hours Power Handling Capacity standard**